


Feature:

- ◆ Compliant with IEEE 802.3 standard
- ◆ Comply with RoHS & Halogen Free requirements.
- ◆ Operating Temperature: 0°C~+70°C
- ◆ Storage temperature range:-25°C to + 120°C.


Electrical Specification @25°C

Inductance:	350 uH Min. @ 100 KHz, 100mV 8mA DC Bias		
Hi-POT :	1500Vrms		
Turn Ratio:	1CT:1CT±2%		
Cw/w:	28pF Max		
Insertion Loss:	-1.0dB Max. @1 ~100MHz		
RETURN LOSS(RL) (Z out=100 OHM)	1-30MHz	30-60MHz	60-100MHz
	-16 dBMin	-12 dBMin	-10 dBMin
Cross Talk:	1-100MHz		
	-30dB Min.		
CMRR	1-100MHz		
	-30dB Min.		

Schematic:

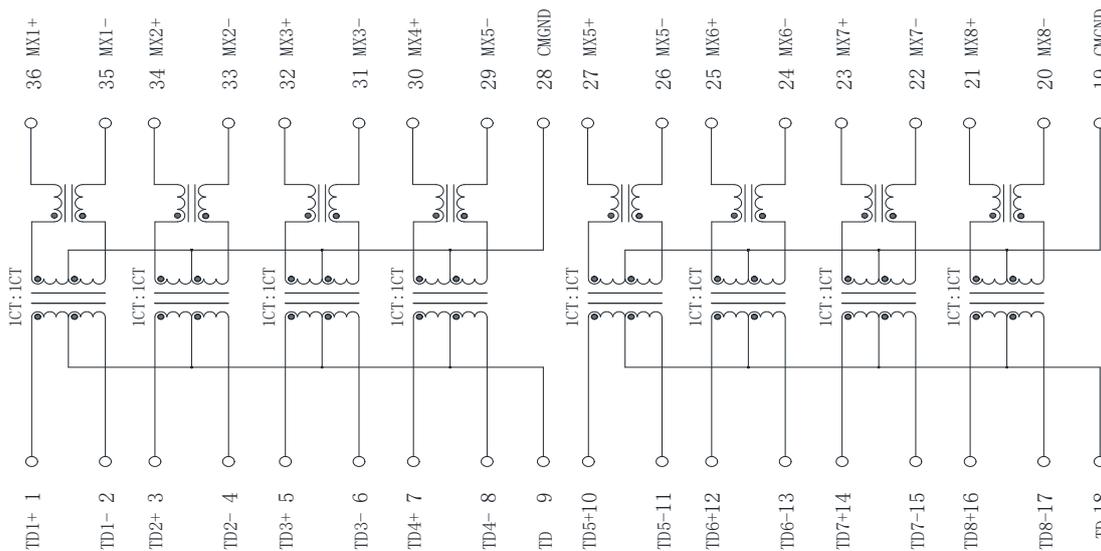

Mechanical:

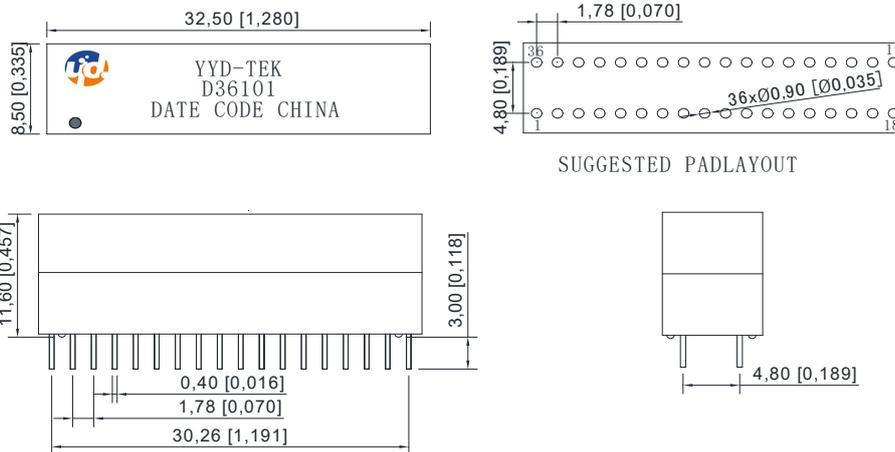

Dimension:mm

Unless otherwise specified,all tolerance are±0.25