



Schematic:

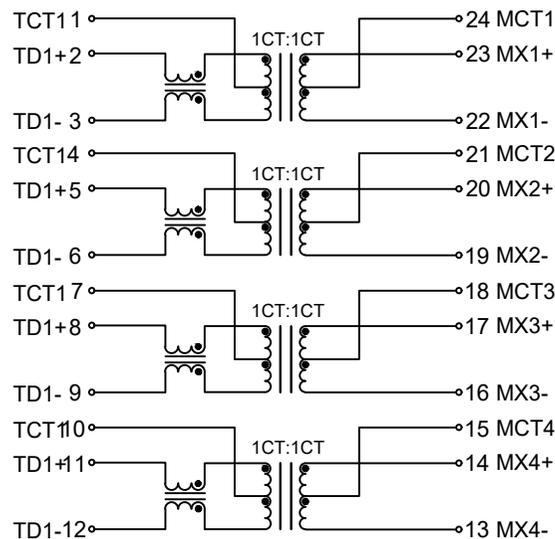

Mechanical:

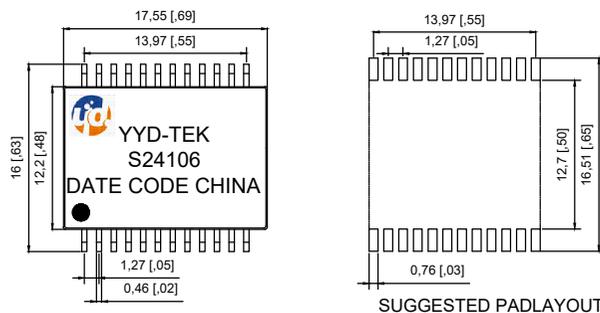

Units:mm[Inches] Tolerances:xx.x0±0.25[0.010]
0.xx±0.05[0.002]

I		H		
NO.	REV	DESCRIPTION.	APPD.	Date

ELECTRICAL SPECIFICATONS@25°C

PARAMETER	SPECIFICATIONS
OPERATING TEMPERATURE	0°C to +70°C
STORAGE TEMPERATURE	-25°C TO +85°C
INDUCTANCE(OCL)	350uH MIN @100KHz 100mV With 8mA DC Bias For (CHANNEL 1,2,3,4)
leakage inductance	0.5uH MAX
URNS RATIO	1:1±3%
Cw/w	30pF MAX
D.C.R	1.2Ω MAX
INSERTION LOSS(IL)	-1.0dB MAX@1MHz-100MHz;
RETURN LOSS(RL) (Z out=100 OHM)	-16dB MIN@1MHz-30MHz;-13dB MIN@30MHz-60MHz -10dB MIN@60MHz-100MHz;
CROSSTALK	-30dB MIN @1MHz-45MHz;-40dB MIN@30MHz-60MHz -35dB MIN@60MHz-100MHz;
DCMR	-30dB MIN @1MHz-43MHz;-37dB MIN@30MHz-60MHz -33dB MIN@60MHz-100MHz;
HI-POT	1500Vrms/1mA/1S
STANDARD	Designed to meet IEEE802.3at Requirement

产品图				深圳市毅远达电子有限公司 Shenzhen Yi Yuan Da Electronic Co., LTD			
未注公差 TOLERANCE UNLESS OTHERWISE SPECIFIED	0. XX ±0.10	X. XX ±0.25	XX. XX ±0.25	Description	Designed to meet IEEE802.3at Requirement 24PIN SMT PROFILE PACKAGE		
比例 SCALE	1:1	版本 REV.	A0		制图 CHECKED	日期 DATE	品名 TITLE
张数 SHEET	4/4	大小 SIZE	A4	校对 CHECKED	日期 DATE	料号 PART NO.	
单位 UNIT	mm inch	角法 PORJ.	核准 APPROVED	日期 DATE	日期 DATE	图号 DWG NO.	